


PHOTOMETRICS:

Intensity (Candlepower) Summary at 25°C - Candelas

Angle	0	22.5	45	67.5	90
MLSWP30LED50					
0	423	423	423	423	423
5	456	463	505	560	471
10	523	554	493	456	414
15	514	631	558	466	429
20	532	507	520	448	379
25	526	651	517	478	372
30	426	462	601	448	330
35	549	510	440	368	289
40	726	637	488	360	252
45	780	708	498	345	214
50	884	766	516	306	183
55	903	839	479	260	158
60	858	754	498	252	125
65	733	699	481	223	90
70	700	696	450	188	61
75	516	569	390	160	38
80	403	431	373	126	22
85	244	302	211	101	12
90	246	215	134	80	8
95	212	194	103	55	9
100	110	133	89	35	10
105	80	74	66	25	10
110	65	59	41	20	9
115	24	30	32	15	9
120	18	20	22	12	8
125	16	17	17	10	6
130	14	16	15	8	5
135	14	14	12	6	3
140	13	12	10	5	2
145	11	10	8	3	1
150	8	8	5	2	1
155	6	5	1	0	0
160	2	0	0	0	0

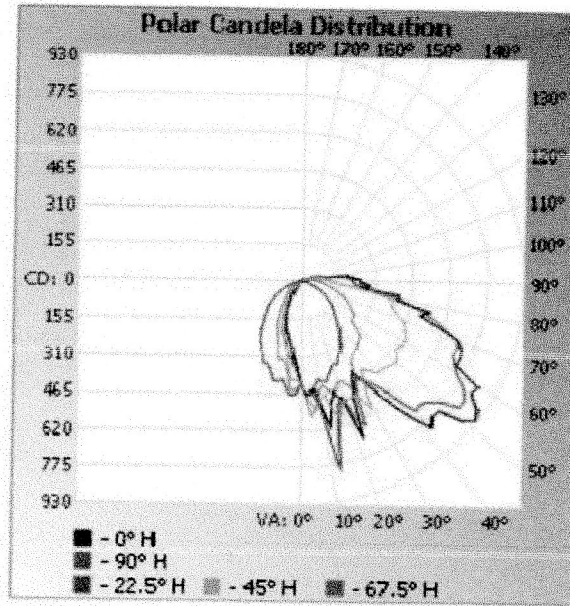

lighting facts
LED Product Partner



MAXLITE

Lighting layouts and spacing criteria available upon request

MaxLite™