Winter Custom Yachts

Holland's Chapel Road
Chatham County, North Carolina

STORMWATER MANAGEMENT:
All new construction shall comply with the County requirement of detention of the 2-year 24 hour storm event. Such compliance shall be accomplished through the use of the existing pond as Best Management Practice device. The runoff amount for the required storm (approx. 11,000 cubic feet) will make it necessary to raise the weir elevation by approximately 0.12 feet.

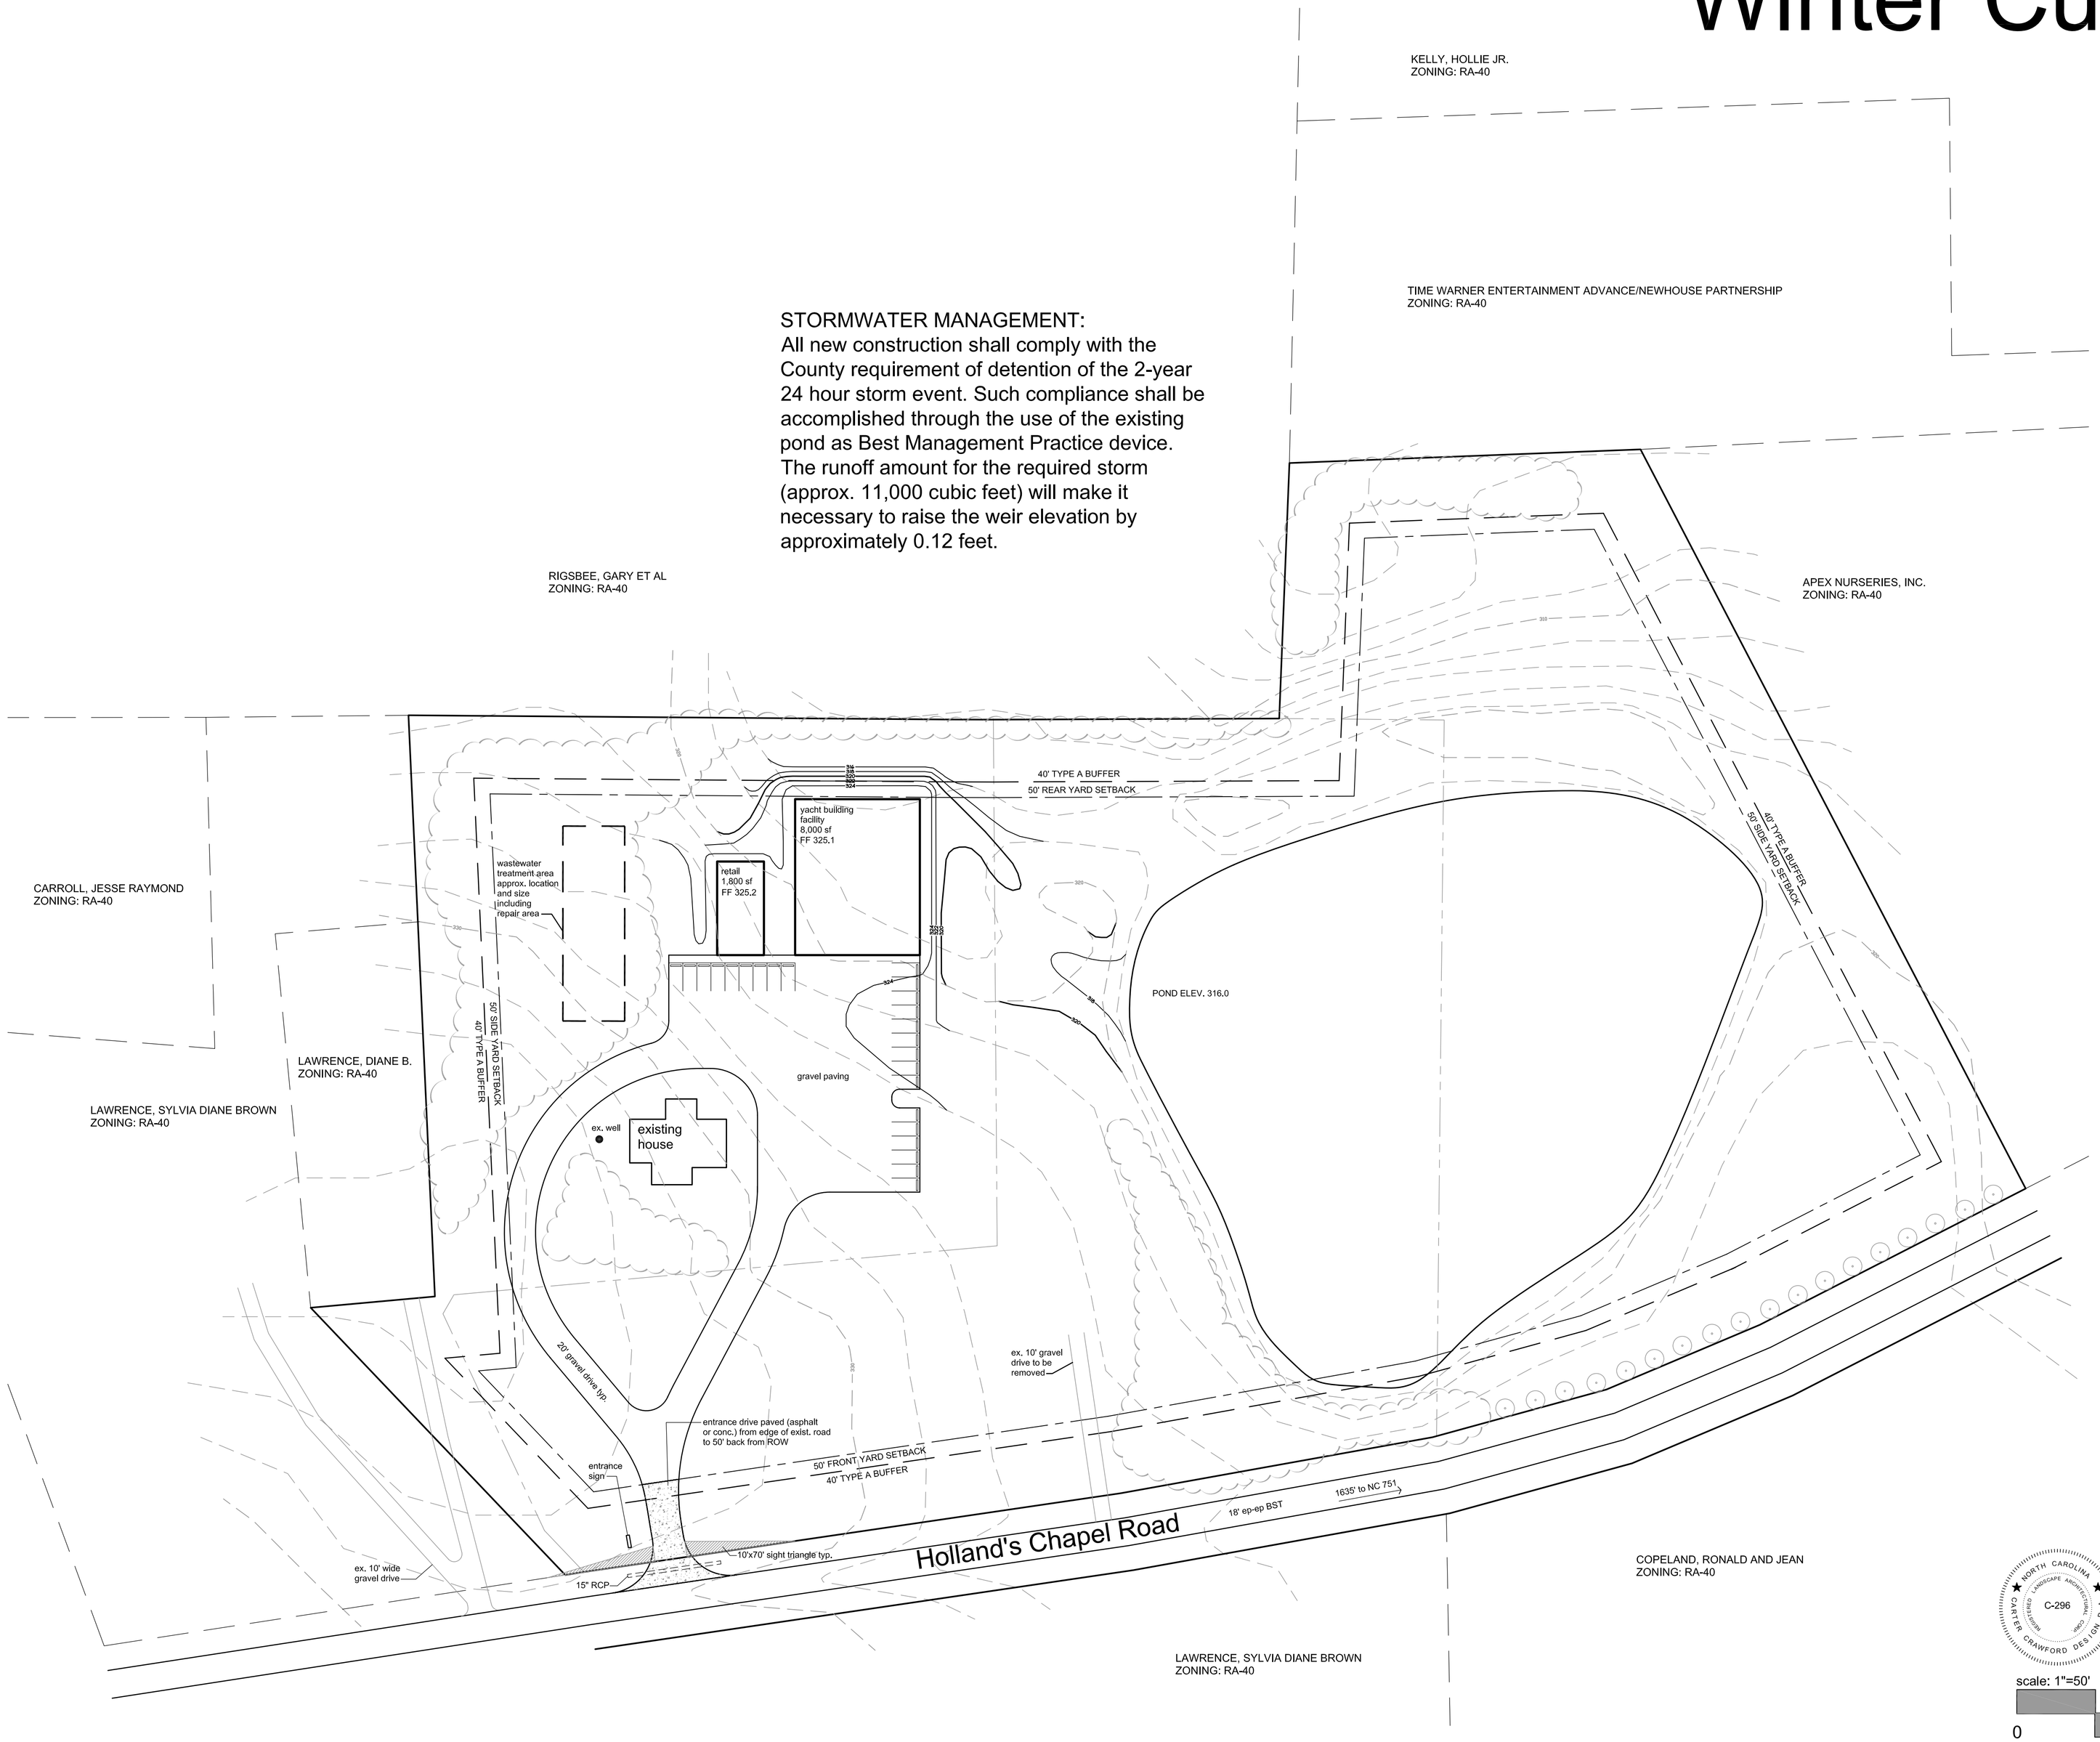

Grading and Drainage Plan

March 17, 2008

NORTH CAROLINA LANDSCAPE ARCHITECTURE C-296 CARTER CRAWFORD DESIGN P.A.

scale: 1"=50'

0 50 100 150

Carter Crawford DESIGN
Land Planning Landscape Architecture Urban Design
400 Heritage Village Lane Apex, NC 27502
919 387 8218 voice 919 387 6548 fax

This document is an instrument of service. All rights to this document, and to the electronic files from which it was produced, including copyrights, are the sole property of Carter Crawford Design P.A. Use of this document or associated electronic files for any purpose not approved by Carter Crawford Design P.A. is prohibited.

sheet 3